



EACOME SPEAKERPHONE SV13B

USER MANUAL

CONTENTS

1.Welcome	1
2.Parts List	2
3.Getting to know your phone	3
3.1 Speakerphone overview	3
3.2 Keypad function	4
3.3 LED indicator	5
4.How to use SV13B	6
4.1 Charging for preparation	6
4.2 Turning the Power On and Off	7
4.3 Connecting a Smartphone via Bluetooth	8
4.3.1 Pairing	8
4.3.2 Connecting	9
4.3.3 Disconnecting	10
4.4 Connection Steps for USB	10
4.5 IN/OUT connection	11

CONTENTS

4.6 Multi-party Conference Call & Line Mode Selection	12
4.7 Daisy Chain Function	13
5. Other Functions	14
5.1 Checking the Speaker Volume Level	14
5.2 Checking the Battery Level	14
6. How to care for your EACOME speakerphone SV13B	15

1. WELCOME


Thank you for purchasing the EACOME professional speakerphone SV13B.
We hope you will enjoy it !

EACOME PROFESSIONAL SPEAKERPHONE SV13B

- Innovative and professional UC communicator for business video calls
- Ultra-wideband DSP processing delivers the great voice Quality
- Plug and play connectivity via Bluetooth, USB and Line in/out
- Connect to your PC, tablet, or smart phone
- Compatible with Windows/MacOS and iOS/Android
- Compact and portable design
- Built-in rechargeable battery supports talking time up to 4 hours
- User-friendly call controls and informations on the speakerphone

2. PARTS LIST

Included Accessories



SV13B Phone



USB Cable



Power Adapter × 1





4-Strand 3.5mm Cable × 1









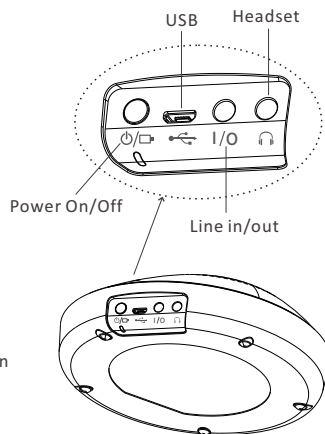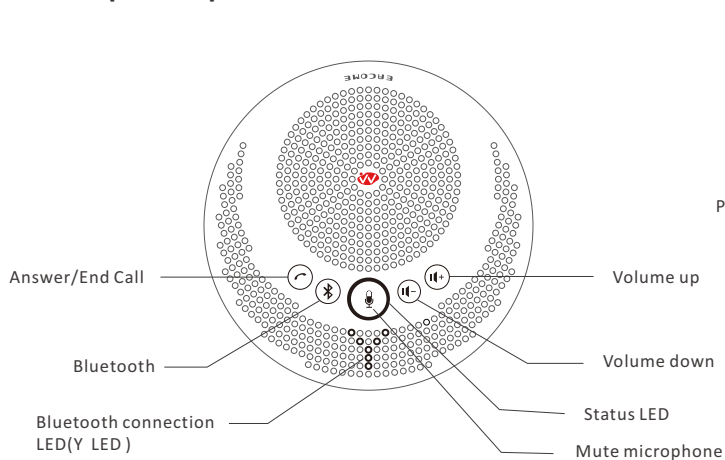

User Manual

3. GETTING TO KNOW YOUR PHONE


3.1 Speakerphone Overview



3.2 Keypad Function

	Answer/End call	Press the Answer/End call button
	Speaker volume	Press the Volume up button
	Speaker volume	Press the Volume down button
	Connect with new Bluetooth device	Press the Bluetooth button to connect with a new Bluetooth device
	Reconnect/disconnect with Bluetooth device	Press the Bluetooth button to reconnect/disconnect with a Bluetooth device
	Mute microphone	Press the Mute microphone button
	On/Off	Long press(3secs) is On/Off,short press is to query the battery power level
	PC mode	Press three keys at the same time into PC mode,The status LED flashes 3 times
	Mobile mode	Press three keys at the same time into Mobile mode,The status LED flashes 6 times


3.3 LED Indicator



Blue: Bluetooth connection
Blinking blue : Bluetooth pairing

All LED blinking: Battery low level

Green: Battery fully charged
Red: Battery charging




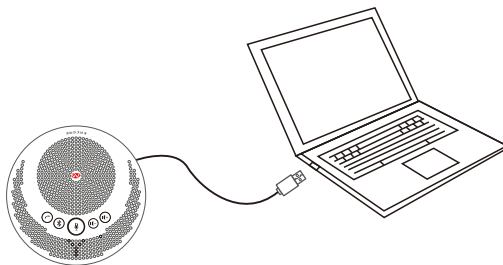
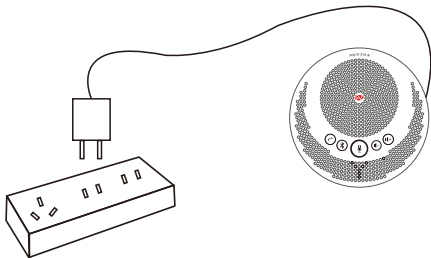
4. HOW TO USE SV13B

4.1 Charging for Preparation

SV13B is built in a rechargeable battery, use the supplied USB cable and the power adapter transmit power and start charging.

Power can be transmitted by connecting the product to either a computer or a commercial 5V USB power adapter.

 Note : The product should be charged when first used. A full charge requires 2 to 3 hours using supplied power adapter.




4.2 Turning the Power On and Off

Press and hold the power button " ϕ/\square " for three seconds or more to turn the power on. Press and hold again for three seconds or more to turn off the power.

In addition, when the USB port of the host is connected to the computer or external audio and video terminals, the host will turn on automatically.

Note: When not charging, if there is no operation for 3 minutes or more, the power turns off automatically (automatic power off function).

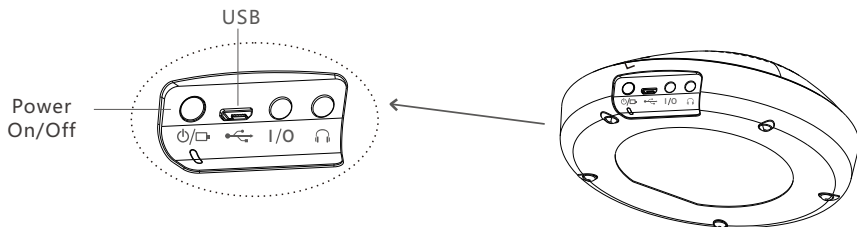

4.3 Connecting a Smartphone via Bluetooth

This product can be paired/connected via Bluetooth with a smartphone running iOS or Android. After connecting, check whether or not the audio is output correctly.


4.3.1 Pairing

Pairing needs to be performed when connecting a smartphone by Bluetooth for the first time and when pairing information has been deleted.

Press and hold the Bluetooth button (ⓑ) for 1 second or more.


Then, the connection LED flashes blue to indicate pairing waiting.

4.3.2 Connecting

This section describes how to connect to a paired smartphone via  Bluetooth. Perform any of the following operations.

a. Press the Bluetooth button  on this product.

After the pairing is successful, the connection LED is bright.

Enable Bluetooth on your mobile device, and select the "EACOME SV13" from the list of available  Bluetooth devices.

b. Perform the Bluetooth connection operation in the smartphone.



4.3.3 Disconnecting


This section describes how to disconnect from a smartphone connected via Bluetooth. Perform any of the following operations.


- a. Press the Bluetooth button.
- b. Perform the Bluetooth disconnection operation in the smartphone.

4.4 Connection Steps for USB

Connect the PC or video system to SV13B USB port with USB cable.

It will take a few seconds to install the driver automatically for the first setup.

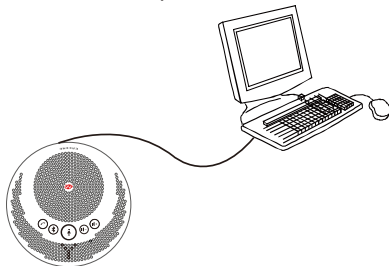


 Note: Right-click the speaker icon at the bottom right of the PC screen and click “Sound”. The “Sound” screen is displayed. Click the “Playback” and “Recording” tabs and check that “EACOME SV13” is set as the default device. If it is not set as the default device, click “EACOME SV13” and click “Set Default”.



4.5 IN/OUT Connection

Use a 3.5mm 4-strand cable to connect your phone or computer device to the "I/O" port of the phone.

If the device connection port is a 3.5mm 3-strand port, you need a transfer adapter for connecting. Insert audio transfer plug into the "I/O" port of SV13B.

Connect the microphone " " port and speaker " " port of Audio Transfer plug to the IN/OUT port of the PC or video conferencing system with two 3.5mm 3-strand cable.

 Note: Please set the phone LINE IN/OUT mode to "PC Mode" when device is PC or video devices.
Or set the phone LINE IN/OUT mode to "Mobile Mode" while connecting a smartphone.

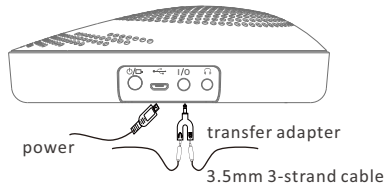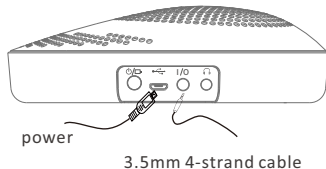

4.6 Multi-party Conference Call & Line Mode Selection

SV13B allows you to hold conference calls via analog LINE IN/OUT(or mobile phone) , USB VOIP and Bluetooth simultaneously.


All above network will be mixed automatically.You can add another line or switch between connected lines during a call freely.

SV13B supports plug and play for the above kinds of lines conveniently.

It is no need to undertake any settings , anytime and anyway.

4.7 Daisy Chain Function

SV13B has daisy chain function. For meeting rooms larger than 30m², you can use the daisy chain function and link two SV13B, the microphone gather coverage can extend up to 8m, and the sound quality will be the same good.

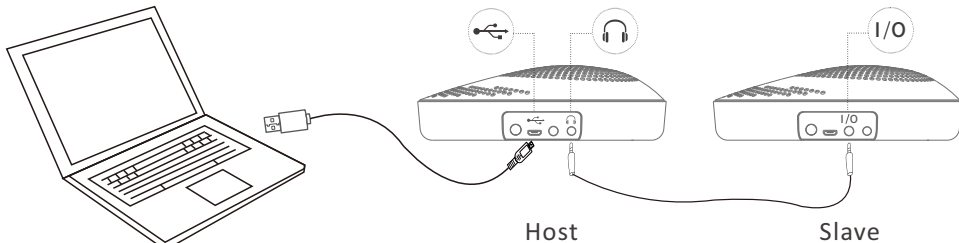

5. OTHER FUNCTIONS

5.1 Checking the Speaker Volume Level

The volume is 16 levels, the first level is the speaker mute, the 16th level is the maximum. The brightness of status LED will increase or decrease with the speaker volume up or down.

5.2 Checking the Battery Level

You can check the level of the built-in rechargeable battery power.

Press the power button () while the phone is on.

The brightness of the status LED varies with the level of the battery power .

The higher the battery power level, the brighter the status LED brightness.

 When all the buttons' LEDs are flashing the battery power battery is so low that it must be charged immediately.

6. HOW TO CARE FOR YOUR EACOME SPEAKERPHONE SV13B

Always store the EACOME speakerphone SV13B with the power off and safely protected. Avoid storage at extreme temperatures (above 70°C/158°F or below -20°C/-4°F). This can shorten battery life and may affect operation. High temperatures may also degrade performance.

Do not expose the EACOME speakerphone SV13B to rain or other liquids.



Eacome Electronics Co.,Ltd.

Address: Floor 15th, Baoneng Technology Building, Qingxiang Road, Longhua District, Shenzhen, China

Tel: +86-75586223352 ext 838 Mob: +86-13922832151

Email: Tylerzhou@eacome.cn Web: www.eacome.com

